



SHUNT TRIP LEFT 208-277 V AC 50/60 HZ 220-250 V DC ACCESSORY FOR 3VA1 and 3VA20 up to 3VA25

Model	
product brand name	SETRON
product designation	Accessories
Product version	Auxiliary release
Accessories	Auxiliary release
General technical data	
Degree of pollution	3
Overvoltage category	III
apparent power consumption / maximum	40 V·A
consumed active power / at DC / maximum	35 W
Voltage	
rated insulation voltage U_i	690 V
surge voltage resistance	4 kV
control supply voltage (U_s) / at AC	208 - 277 V 50/60 Hz
control supply voltage (U_s) / at DC	220 - 250 V
Mechanical Design	
Height	65.1 mm
Width	25.7 mm
number of slots	3
depth	31.2 mm
net weight	91 g
tightening torque / with screw-type terminals / minimum	0.4 N·m
tightening torque / with screw-type terminals / maximum	0.5 N·m
Connections according IEC	
stripped length	10 mm
AWG number / as coded connectable conductor cross section / for auxiliary contacts	
• minimum	20
• maximum	16
Connections according UL	
stripped length [in]	0.4 in
tightening torque [lbf·in] / with screw-type terminals / minimum	3.5 lbf·in
tightening torque [lbf·in] / with screw-type terminals / maximum	4.4 lbf·in
Further information	
Information- and Downloadcenter (Catalogs, Brochures,...)	
http://www.siemens.com/lowvoltage/catalogs	

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9988-0BL33>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9988-0BL33>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9988-0BL33

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

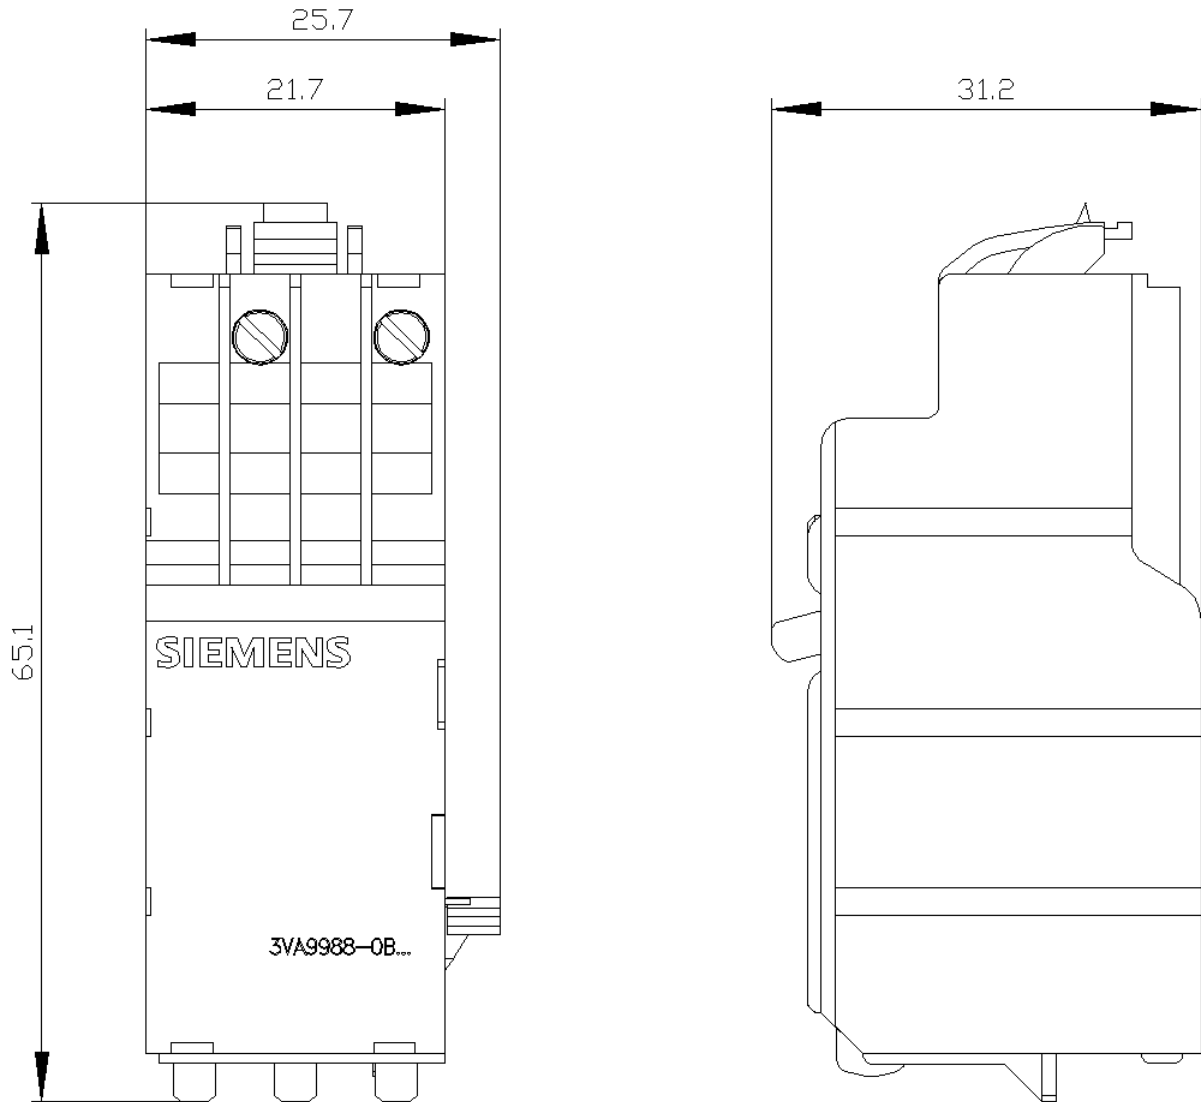

last modified:

12/20/2020 