



SIRIUS soft starter 200-480 V 210 A, 110-250 V AC Screw terminals

product brand name
product category
product designation
product type designation
manufacturer's article number

- of high feature HMI module usable
- of communication module PROFINET standard usable
- of communication module PROFINET high-feature usable
- of communication module PROFIBUS usable
- of communication module Modbus TCP usable
- of communication module Modbus RTU usable
- of communication module Ethernet/IP
- of circuit breaker usable at 400 V
- of circuit breaker usable at 500 V
- of circuit breaker usable at 400 V at inside-delta circuit
- of circuit breaker usable at 500 V at inside-delta circuit
- of the gG fuse usable up to 690 V
- of the gG fuse usable at inside-delta circuit up to 500 V
- of full range R fuse link for semiconductor protection usable up to 690 V
- of back-up R fuse link for semiconductor protection usable up to 690 V

SIRIUS
 Hybrid switching devices
 Soft starter
 3RW55

[3RW5980-0HF00](#)

[3RW5980-0CS00](#)

[3RW5950-0CH00](#)

[3RW5980-0CP00](#)

[3RW5980-0CT00](#)

[3RW5980-0CR00](#)

[3RW5980-0CE00](#)

[3VA2325-7MN32-0AA0](#); Type of coordination 1, Iq = 65 kA, CLASS 10

[3VA2325-7MN32-0AA0](#); Type of coordination 1, Iq = 65 kA, CLASS 10

[3VA2440-7MN32-0AA0](#); Type of coordination 1, Iq = 65 kA, CLASS 10

[3VA2440-7MN32-0AA0](#); Type of coordination 1, Iq = 65 kA, CLASS 10

2x3NA3354-6; Type of coordination 1, Iq = 65 kA

2x3NA3354-6; Type of coordination 1, Iq = 65 kA

[3NE1230-2](#); for supply systems up to 500 V; type of coordination 2, Iq = 65 kA

[3NE3333](#); Type of coordination 2, Iq = 65 kA

General technical data

starting voltage [%]	20 ... 100 %
stopping voltage [%]	50 %; non-adjustable
start-up ramp time of soft starter	0 ... 360 s
ramp-down time of soft starter	0 ... 360 s
start torque [%]	10 ... 100 %
stopping torque [%]	10 ... 100 %
torque limitation [%]	20 ... 200 %
current limiting value [%] adjustable	125 ... 800 %
breakaway voltage [%] adjustable	40 ... 100 %
breakaway time adjustable	0 ... 2 s
number of parameter sets	3
accuracy class according to IEC 61557-12	5 %
certificate of suitability	
• CE marking	Yes
• UL approval	Yes

• condition monitoring	Yes
• automatic parameterisation	Yes
• application wizards	Yes
• alternative run-down	Yes
• emergency operation mode	Yes
• reversing operation	Yes
• soft starting at heavy starting conditions	Yes

Power Electronics

operational current

• at 40 °C rated value	210 A
• at 40 °C rated value minimum	42 A
• at 50 °C rated value	186 A
• at 60 °C rated value	170 A

operational current at inside-delta circuit

• at 40 °C rated value	364 A
• at 50 °C rated value	322 A
• at 60 °C rated value	294 A

operating voltage

• rated value	200 ... 480 V
• at inside-delta circuit rated value	200 ... 480 V

relative negative tolerance of the operating voltage

-15 %

relative positive tolerance of the operating voltage

10 %

relative negative tolerance of the operating voltage at inside-delta circuit

-15 %

relative positive tolerance of the operating voltage at inside-delta circuit

10 %

operating power for 3-phase motors

• at 230 V at 40 °C rated value	55 kW
• at 230 V at inside-delta circuit at 40 °C rated value	110 kW
• at 400 V at 40 °C rated value	110 kW
• at 400 V at inside-delta circuit at 40 °C rated value	200 kW

Operating frequency 1 rated value

50 Hz

Operating frequency 2 rated value

60 Hz

relative negative tolerance of the operating frequency

-10 %

relative positive tolerance of the operating frequency

10 %

minimum load [%]

10 %; Relative to set le

power loss [W] for rated value of the current at AC

• at 40 °C after startup	63 W
• at 50 °C after startup	56 W
• at 60 °C after startup	51 W

power loss [W] at AC at current limitation 350 %

• at 40 °C during startup	3 550 W
• at 50 °C during startup	2 967 W
• at 60 °C during startup	2 605 W

type of the motor protection

Electronic, tripping in the event of thermal overload of the motor

Control circuit/ Control

type of voltage of the control supply voltage

AC

control supply voltage at AC

• at 50 Hz	110 ... 250 V
• at 60 Hz	110 ... 250 V

relative negative tolerance of the control supply voltage at AC at 50 Hz

-15 %

relative positive tolerance of the control supply voltage at AC at 50 Hz

10 %

relative negative tolerance of the control supply voltage at AC at 60 Hz

-15 %

relative positive tolerance of the control supply voltage at AC at 60 Hz

10 %

control supply voltage frequency

50 ... 60 Hz

relative negative tolerance of the control supply voltage frequency

-10 %

relative positive tolerance of the control supply voltage frequency

10 %

control supply current in standby mode rated value

100 mA

holding current in bypass operation rated value

150 mA

inrush current by closing the bypass contacts maximum	0.87 A
inrush current peak at application of control supply voltage maximum	43 A
duration of inrush current peak at application of control supply voltage	1.6 ms
design of the overvoltage protection	Varistor
design of short-circuit protection for control circuit	4 A gG fuse (I _{cu} =1 kA), 6 A quick-acting fuse (I _{cu} =1 kA), C1 miniature circuit breaker (I _{cu} = 600 A), C6 miniature circuit breaker (I _{cu} = 300 A); Is not part of scope of supply

Inputs/ Outputs

number of digital inputs	4
<ul style="list-style-type: none"> parameterizable 	4
<ul style="list-style-type: none"> number of digital outputs 	4
<ul style="list-style-type: none"> number of digital outputs parameterizable 	3
<ul style="list-style-type: none"> number of digital outputs not parameterizable 	1
digital output version	3 normally-open contacts (NO) / 1 changeover contact (CO)
number of analog outputs	1
switching capacity current of the relay outputs	
<ul style="list-style-type: none"> at AC-15 at 250 V rated value 	3 A
<ul style="list-style-type: none"> at DC-13 at 24 V rated value 	1 A

Installation/ mounting/ dimensions

mounting position	Vertical (can be rotated +/- 90° and tilted forward or backward +/- 22.5°)
fastening method	screw fixing
height	393 mm
width	210 mm
depth	203 mm
required spacing with side-by-side mounting	
<ul style="list-style-type: none"> forwards 	10 mm
<ul style="list-style-type: none"> backwards 	0 mm
<ul style="list-style-type: none"> upwards 	100 mm
<ul style="list-style-type: none"> downwards 	75 mm
<ul style="list-style-type: none"> at the side 	5 mm
weight without packaging	10.2 kg

Connections/ Terminals

type of electrical connection	
<ul style="list-style-type: none"> for main current circuit 	busbar connection
<ul style="list-style-type: none"> for control circuit 	screw-type terminals
width of connection bar maximum	45 mm
wire length for thermistor connection	
<ul style="list-style-type: none"> with conductor cross-section = 0.5 mm² maximum 	50 m
<ul style="list-style-type: none"> with conductor cross-section = 1.5 mm² maximum 	150 m
<ul style="list-style-type: none"> with conductor cross-section = 2.5 mm² maximum 	250 m
type of connectable conductor cross-sections	
<ul style="list-style-type: none"> for DIN cable lug for main contacts stranded 	2x (50 ... 240 mm ²)
<ul style="list-style-type: none"> for DIN cable lug for main contacts finely stranded 	2x (70 ... 240 mm ²)
type of connectable conductor cross-sections	
<ul style="list-style-type: none"> for control circuit solid 	1x (0.5 ... 4.0 mm ²), 2x (0.5 ... 2.5 mm ²)
<ul style="list-style-type: none"> for control circuit finely stranded with core end processing 	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.5 mm ²)
<ul style="list-style-type: none"> at AWG cables for control circuit solid 	1x (20 ... 12), 2x (20 ... 14)
wire length	
<ul style="list-style-type: none"> between soft starter and motor maximum 	800 m
<ul style="list-style-type: none"> at the digital inputs at DC maximum 	1 000 m
tightening torque	
<ul style="list-style-type: none"> for main contacts with screw-type terminals 	14 ... 24 N·m
<ul style="list-style-type: none"> for auxiliary and control contacts with screw-type terminals 	0.8 ... 1.2 N·m
tightening torque [lbf·in]	
<ul style="list-style-type: none"> for main contacts with screw-type terminals 	124 ... 210 lbf·in
<ul style="list-style-type: none"> for auxiliary and control contacts with screw-type terminals 	7 ... 10.3 lbf·in

Ambient conditions

installation altitude at height above sea level maximum	5 000 m; Derating as of 1000 m, see catalog
---	---

ambient temperature

- during operation
- during storage and transport

-25 ... +60 °C; Please observe derating at temperatures of 40 °C or above
-40 ... +80 °C

environmental category

- during operation according to IEC 60721
- during storage according to IEC 60721
- during transport according to IEC 60721

3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4
2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
acc. to IEC 60947-4-2: Class A

EMC emitted interference**Communication/ Protocol****communication module is supported**

- PROFINET standard
- PROFINET high-feature
- EtherNet/IP
- Modbus RTU
- Modbus TCP
- PROFIBUS

Yes
Yes
Yes
Yes
Yes
Yes

UL/CSA ratings**manufacturer's article number****• of circuit breaker**

- usable for Standard Faults at 460/480 V according to UL
- usable for High Faults at 460/480 V according to UL
- usable for Standard Faults at 460/480 V at inside-delta circuit according to UL
- usable for High Faults at 460/480 V at inside-delta circuit according to UL
- usable for Standard Faults at 575/600 V according to UL
- usable for High Faults at 575/600 V at inside-delta circuit according to UL
- usable for Standard Faults at 575/600 V at inside-delta circuit according to UL

Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq = 10 kA
Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq max = 65 kA
Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq = 10 kA
Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq max = 65 kA
Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq = 10 kA
Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq max = 65 kA
Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq = 10 kA

• of the fuse

- usable for Standard Faults up to 575/600 V according to UL
- usable for High Faults up to 575/600 V according to UL
- usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL
- usable for High Faults at inside-delta circuit up to 575/600 V according to UL

Type: Class J / L, max. 700 A; Iq = 10 kA
Type: Class J / L, max. 700 A; Iq = 100 kA
Type: Class J / L, max. 700 A; Iq = 10 kA
Type: Class J / L, max. 700 A; Iq = 100 kA

operating power [hp] for 3-phase motors

- at 200/208 V at 50 °C rated value
- at 220/230 V at 50 °C rated value
- at 460/480 V at 50 °C rated value
- at 200/208 V at inside-delta circuit at 50 °C rated value
- at 220/230 V at inside-delta circuit at 50 °C rated value
- at 460/480 V at inside-delta circuit at 50 °C rated value

60 hp
60 hp
150 hp
100 hp
125 hp
250 hp

contact rating of auxiliary contacts according to UL

R300-B300

Safety related data**protection class IP on the front according to IEC 60529**

IP00; IP20 with cover

touch protection on the front according to IEC 60529 electromagnetic compatibility

finger-safe, for vertical contact from the front with cover
acc. to IEC 60947-4-2

ATEX**certificate of suitability**

- ATEX
- IECEx
- according to ATEX directive 2014/34/EU

Yes
Yes
BVS 18 ATEX F 003 X

type of protection according to ATEX directive 2014/34/EU	II (2)G [Ex eb Gb] [Ex db Gb] [Ex pxb Gb], II (2)D [Ex tb Db] [Ex pxb Db], I (M2) [Ex db Mb]
hardware fault tolerance according to IEC 61508 relating to ATEX	0
PFDAvg with low demand rate according to IEC 61508 relating to ATEX	0.008
PFHD with high demand rate according to EN 62061 relating to ATEX	5E-7 1/h
Safety Integrity Level (SIL) according to IEC 61508 relating to ATEX	SIL1
T1 value for proof test interval or service life according to IEC 61508 relating to ATEX	3 a

Certificates/ approvals

General Product Approval

EMC



[Confirmation](#)



For use in hazardous locations

Declaration of Conformity

Test Certificates

Marine / Shipping



[Type Test Certificates/Test Report](#)



Marine / Shipping

other



[Confirmation](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=3RW5543-6HA14>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3RW5543-6HA14>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5543-6HA14>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3RW5543-6HA14&lang=en

Characteristic: Tripping characteristics, I²t, Let-through current




<https://support.industry.siemens.com/cs/ww/en/ps/3RW5543-6HA14/char>

Characteristic: Installation altitude

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mfb=3RW5543-6HA14&objecttype=14&gridview=view1>

Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

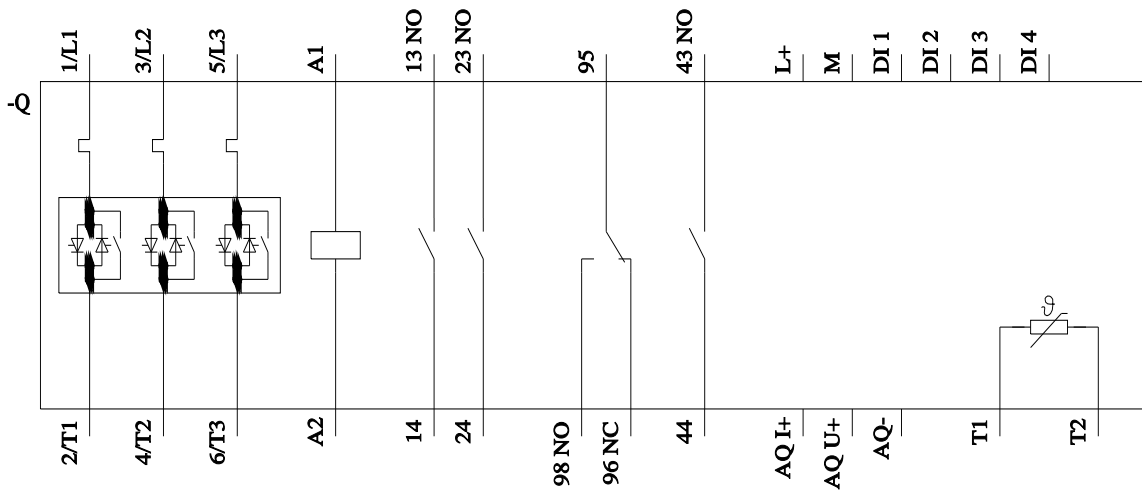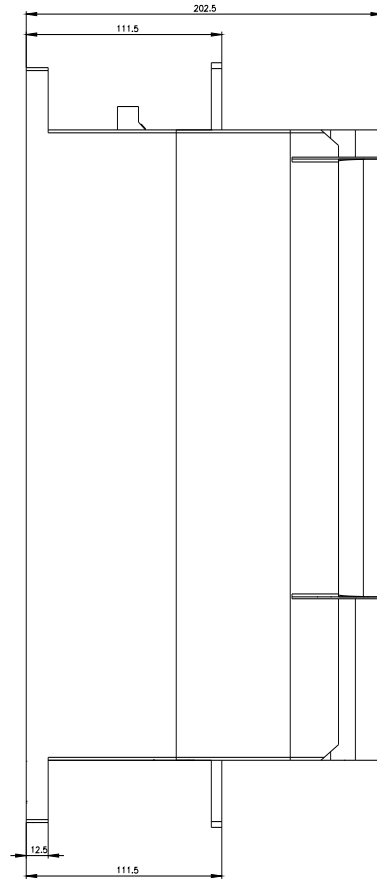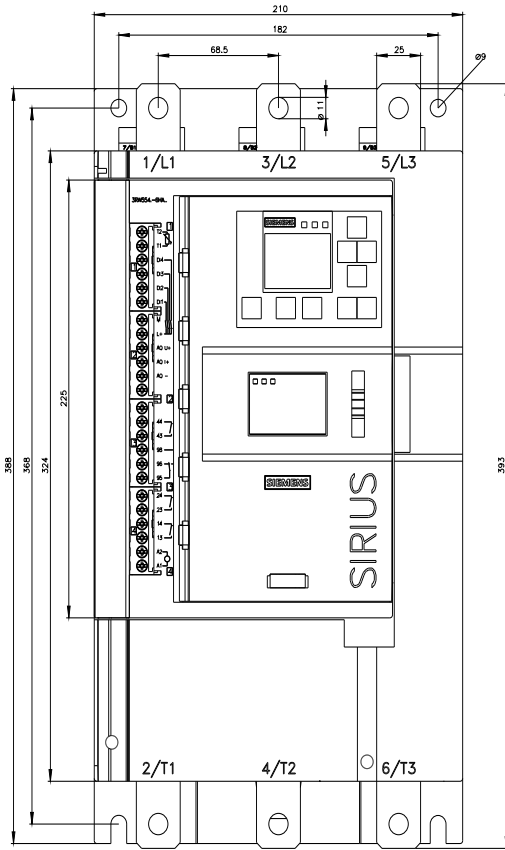

last modified:

1/13/2023 