## SIEMENS

## Data sheet



SIRIUS soft starter Values at 400 V, 40 °C standard: 356 A, 200 kW Inside-delta: 617 A, 355 kW 200-460 V AC, 230 V AC Screw terminals !!! Phased-out product !!! Successor is SIRIUS 3RW5, Preferred successor type is >>3RW5546-6HA14<<

3RW4446-6BC44

product brand name		SIRIUS
product feature		
<ul> <li>integrated bypass contact system</li> </ul>		Yes
thyristors		Yes
product function		
<ul> <li>intrinsic device protection</li> </ul>		Yes
<ul> <li>motor overload protection</li> </ul>		Yes
<ul> <li>evaluation of thermistor motor protection</li> </ul>		Yes
external reset		Yes
<ul> <li>adjustable current limitation</li> </ul>		Yes
inside-delta circuit		Yes
product component motor brake output		Yes
insulation voltage rated value	V	690
degree of pollution		3, acc. to IEC 60947-4-2
reference code acc. to DIN EN 61346-2		Q
reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750		G
Power Electronics		
product designation		Soft starter
operational current		
<ul> <li>at 40 °C rated value</li> </ul>	А	356
<ul> <li>at 50 °C rated value</li> </ul>	А	315
• at 60 °C rated value	А	280
operational current for 3-phase motors at inside-delta circuit		
<ul> <li>at 40 °C rated value</li> </ul>	А	617
<ul> <li>at 50 °C rated value</li> </ul>	А	546
<ul> <li>at 60 °C rated value</li> </ul>	А	485
yielded mechanical performance for 3-phase motors		
• at 230 V		
— at standard circuit at 40 °C rated value	W	110 000
- at inside-delta circuit at 40 °C rated value	W	200 000
• at 400 V		
— at standard circuit at 40 °C rated value	W	200 000
— at inside-delta circuit at 40 °C rated value	W	355 000
yielded mechanical performance [hp] for 3-phase AC motor at 200/208 V at standard circuit at 50 °C rated value	hp	100

	_	
operating frequency rated value	Hz	50 60
relative negative tolerance of the operating frequency	%	-10
relative positive tolerance of the operating frequency	%	10
operating voltage at standard circuit rated value	V	200 460
relative negative tolerance of the operating voltage at standard circuit	%	-15
relative positive tolerance of the operating voltage at standard circuit	%	10
operating voltage at inside-delta circuit rated value	V	200 460
relative negative tolerance of the operating voltage at inside-delta circuit	%	-15
relative positive tolerance of the operating voltage at inside-delta circuit	%	10
minimum load [%]	%	8
adjustable motor current for motor overload protection minimum rated value	A	71
continuous operating current [% of le] at 40 °C	%	115
power loss [W] at operational current at 40 °C during operation typical	W	174
Control circuit/ Control		
type of voltage of the control supply voltage	_	AC
control supply voltage frequency 1 rated value	Hz	50
control supply voltage frequency 2 rated value	Hz	60
relative negative tolerance of the control supply voltage frequency	%	-10
relative positive tolerance of the control supply voltage frequency	%	10
control supply voltage 1 at AC		
• at 50 Hz rated value	V	230
• at 60 Hz rated value	V	230
relative negative tolerance of the control supply voltage at AC at 50 Hz	%	-15
relative positive tolerance of the control supply voltage at AC at 50 Hz	%	10
relative negative tolerance of the control supply voltage at AC at 60 Hz	%	-15
relative positive tolerance of the control supply voltage at AC at 60 Hz	%	10
display version for fault signal		Display
Mechanical data	_	
width	mm	210
height	mm	230
depth	mm	298
fastening method	-	screw fixing
mounting position		with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back
required spacing with side-by-side mounting		
• upwards	mm	100
at the side	mm	5
downwards	mm	75
wire length maximum	m	500
number of poles for main current circuit		3
Connections/ Terminals		
type of electrical connection		
<ul> <li>for main current circuit</li> </ul>		busbar connection
<ul> <li>for auxiliary and control circuit</li> </ul>		screw-type terminals
number of NC contacts for auxiliary contacts		0
number of NO contacts for auxiliary contacts		3
number of CO contacts for auxiliary contacts		1
type of connectable conductor cross-sections for main contacts for box terminal using the front		

70 240 mm <sup>2</sup> 70 240 mm <sup>2</sup> 95 300 mm <sup>2</sup> 120 185 mm <sup>2</sup> 120 185 mm <sup>2</sup> 120 240 mm <sup>2</sup> min. 2x 50 mm <sup>2</sup> , max. 2x 185 mm <sup>2</sup>
70 240 mm <sup>2</sup> 95 300 mm <sup>2</sup> 120 185 mm <sup>2</sup> 120 185 mm <sup>2</sup> 120 240 mm <sup>2</sup>
95 300 mm <sup>2</sup> 120 185 mm <sup>2</sup> 120 185 mm <sup>2</sup> 120 240 mm <sup>2</sup>
120 185 mm² 120 240 mm²
120 185 mm² 120 240 mm²
120 240 mm²
min. 2x 50 mm², max. 2x 185 mm²
min. 2x 50 mm <sup>2</sup> , max. 2x 185 mm <sup>2</sup>
min. 2x 50 mm <sup>2</sup> , max. 2x 185 mm <sup>2</sup>
max. 2x 70 mm <sup>2</sup> , max. 2x 240 mm <sup>2</sup>
250 500 kcmil
3/0 600 kcmil
min. 2x 2/0, max. 2x 500 kcmil
50 240 mm²
70 240 mm²
2x (0.5 2.5 mm <sup>2</sup> )
2x (0.5 1.5 mm²)
2/0 500 kcmil
2x (20 14)
2x (20 16)
m 5 000
2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 3K6 (no formation of ice, no condensation), 3C3 (no salt
mist), 3S2 (sand must not get into the devices), 3M6
°C 60
°C -25 +80
°C 40
IP00; IP20 with box terminal/cover
finger-safe, for vertical contact from the front with box terminal/cover
Declaration of

Conformity					
<u>Miscellaneous</u>	<u>Type Test Certific-</u> ates/Test Report	Special Test Certific- ate	ABS	BUREAU VERITAS	Lloyd's Register urs
Marine / Shipping		other			
PRS	DNV-GL	<u>Confirmation</u>			

UL/CSA ratings		
yielded mechanical performance [hp] for 3-phase AC motor		
• at 200/208 V		
— at inside-delta circuit at 50 °C rated value	hp	150
• at 220/230 V		
<ul> <li>— at standard circuit at 50 °C rated value</li> </ul>	hp	125
<ul> <li>— at inside-delta circuit at 50 °C rated value</li> </ul>	hp	200
• at 460/480 V		
— at standard circuit at 50 °C rated value	hp	250
— at inside-delta circuit at 50 °C rated value	hp	450
contact rating of auxiliary contacts according to UL		B300 / R300

Further information

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW4446-6BC44


## Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW4446-6BC44


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RW4446-6BC44

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RW4446-6BC44&lang=en







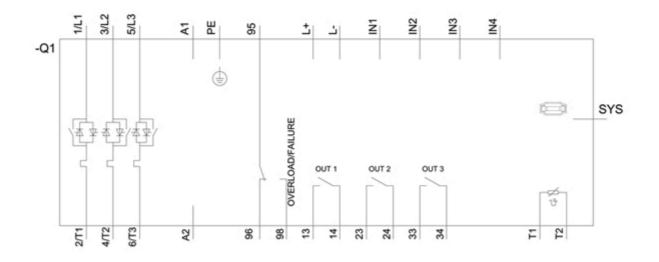

last modified:

12/15/2020 🖸